

January 19, 1966

Mr. T. H. Nelson  
Vassar College  
Poughkeepsie, New York 12601

Dear Mr. Nelson:

Thank you for your inquiry through DATA PROCESSING MAGAZINE about IDEAL Tape Splicers.

We are enclosing our current brochure and a splice made on an IDEAL Splicer - Model SC-2. Please contact us if additional information is required.

Today's prices are as follows:

IDEAL Tape Splicer - Model SC-2      \$85.00 Each

IDEAL Splicing Patches

1 Gross	\$10.00	Per Gross
6 Gross	8.00	" "
24 Gross	6.00	" "

Prices are FOB Ridgewood, New Jersey, with prompt shipment from stock.


Your interest in our product is appreciated and we hope to have the privilege of serving you.

Yours very truly,

DONAULD Inc.

*D. T. Auld*  
D. T. Auld

enc.

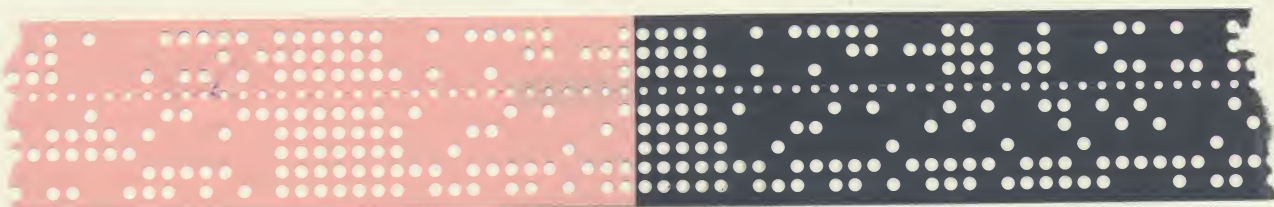

**NEW**



## **TAPE SPLICERS**

- Butt (end to end) splicers for all equipment.
- Feed Hole Alignment — Accurately spaced pins assure perfect registration.
- One splicer handles all tapes.
- Pressure Sensitive Splicing — no heat or moisture required.



## **SPLICING PATCHES**


- Fully punched pressure sensitive patches with an adhesive for sealing oiled tapes.
- Two piece backing for easy removal.
- IDEAL Patches will read on optical units and on mechanical units.
- For "loops" apply patches to both sides of the tape.
- Available in standard 5, 7, and 8 channel. 6 channel with advanced feed holes for typesetting.
- Packed in plastic boxes of 1 gross each.

## **The IDEAL METHOD of splicing**

Currently being used by:

- AIR LINES
- BANKS
- COMMUNICATIONS COMPANIES
- COMPUTER MANUFACTURERS
- DATA PROCESSING CENTERS
- GOVERNMENT AGENCIES
- NEWS SERVICES
- NUMERICAL CONTROL INSTALLATIONS
- PUBLISHERS
- RAILROADS
- TYPESETTERS

for correcting, repairing and altering tapes; as well as splicing short tapes for continuous transmission.



## **TAPE SPLICERS**

**for  
FAST  
ECONOMICAL  
SPLICING**


**IDEAL INC.**

P. O. Box 104 Ridgewood, N. J. 07451

201 444-6573



for  
CUTTING

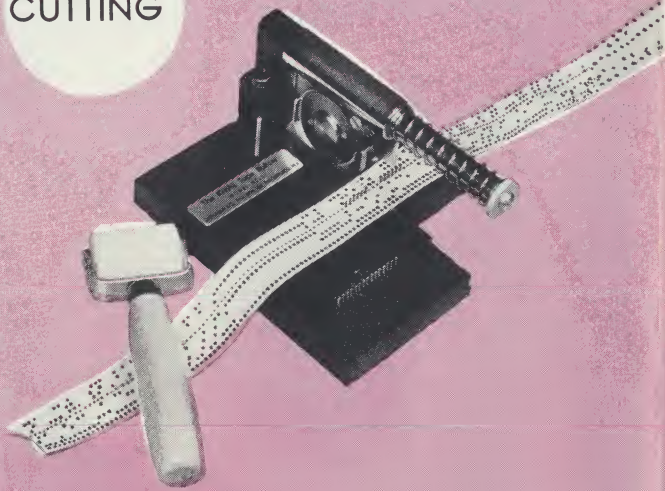

MODEL SC-2  
Pat. No. 3,209,635



- Place tape on upper pins for cutting to match tape ends or to edit tapes.

IDEAL splicing permits uninterrupted transmissions without loss of a character.


All metal 5" x 5 1/2" x 3" with non-skid base. Weight 2 1/2 pounds.

## The **ULTIMATE** in tape splicers

for  
SPLICING

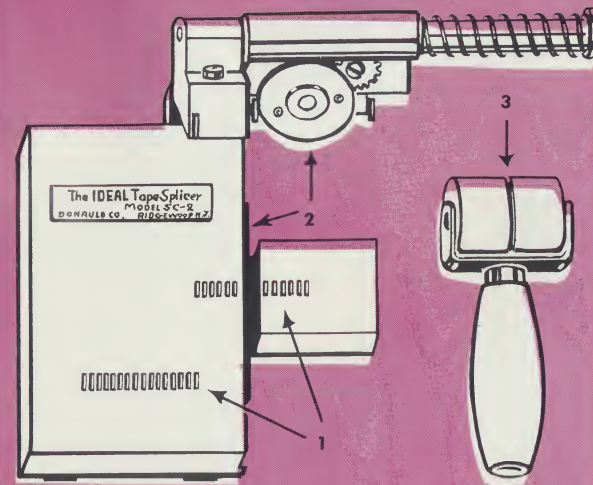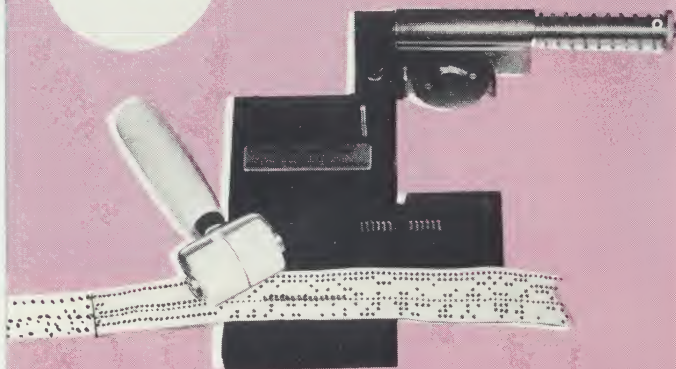

1. Two rows of feed hole pins; one for splicing and one for cutting.
2. Floating self-sharpening rotary knife and stationary lower blade for straight, clean cuts.
3. Slotted nylon roller for sealing splices.

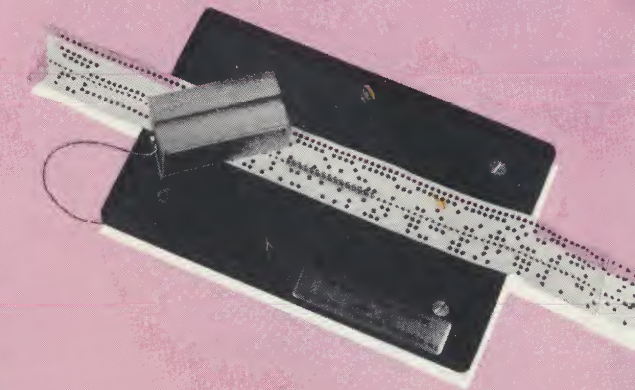

Improved version of original IDEAL Tape Splicer for mending torn tapes and occasional splicing.

MODEL S-3

## For splicing and editing all perforated tapes

### To make an IDEAL splice:

- Remove backing and place an IDEAL Splicing Patch on block, adhesive side up, with "feed holes" over pins.
- Place torn or matching tapes end-to-end with "feed holes" over pins.
- Apply pressure with nylon roller to seal. Remove completed splice.